
XProtect[®] Corporate



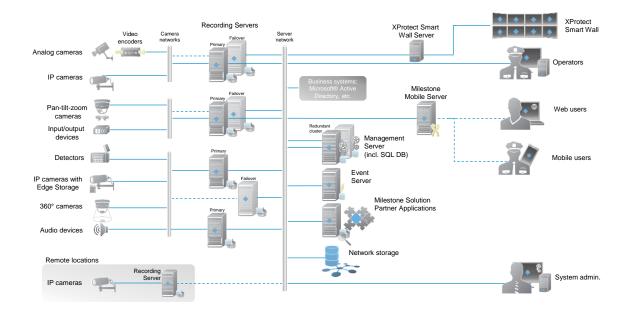

XProtect Corporate is powerful IP video management software (VMS) designed for large-scale and high-security deployments. Its single management interface enables efficient administration of the system, including all cameras and security devices, regardless of the system's size or if it is distributed across multiple sites. For systems demanding supreme situational awareness and precise response to incidents, XProtect Corporate includes Milestone XProtect® Smart Wall. XProtect Corporate features advanced video grooming functions and encryption capabilities that help organizations reducing the video storage cost, while ensure the integrity of video evidence and comply with industry and federal regulations.

Limitless multi-server and multi-site solution:

Supports an unlimited number of cameras, servers, sites and users, allowing you to grow your installation according to your needs

Centralized management:

Full configuration of all devices, recording servers and users from a central Management Client connected to the Management Server, which holds all configuration settings in a Microsoft SQL database

High availability - Failover Recording Servers:

Redundancy option ensures maximum system uptime while minimizing video interruption. Operates in two failover modes: cold stand-by and hot stand-by

Milestone Interconnect™:

A unique system concept that allows all Milestone VMS, Milestone Husky $^{\text{TM}}$ products and Milestone Arcus $^{\text{TM}}$ embedded appliances to be interconnected with XProtect Corporate to gain central surveillance operation across geographically dispersed sites

Milestone Federated Architecture™:

System concept that enables multiple individual XProtect Corporate and XProtect Expert systems to be connected with a central XProtect Corporate system in a hierarchical architecture for infinite scalability and central management

Bookmarking:

Allows users to mark video sections of particular interest and add descriptive notes for later analysis or sharing with other users

Alarm Manager:

Single-point alarm function that provides a consolidated and clear overview of security and system-related alarms

Intuitive map function:

Multi-layered map provides interactive access and control of the complete surveillance system and seamless drag-anddrop integration with XProtect Smart Wall

XProtect Smart Wall – included:

Flexible and hardware independent video wall option that seamlessly integrates with the Management Client and XProtect® Smart Client

Metadata support:

Supports reception, storage and export of video metadata, including metadata from camera-resided video analytics and location data in Video Push from Milestone Mobile

Edge Storage:

Uses camera-based storage as a complement to the central storage in the recording servers, with flexible video retrieval based on time schedules, events or manual requests

Secure multi-stage storage:

Unique data storage solution that combines superior performance and scalability with video data grooming for cost-efficient, long-term video storage, with the option to encrypt and digitally sign stored video and audio

Evidence Lock:

Secures availability of video for investigations by overriding normal video retention and grooming policies

Versatile rule system:

Versatile rule engine makes it easy to automate different aspects of the system, including the control of cameras, system behavior and external devices, such as lights and doors, based on events or time schedules, eliminating the need for manual control

Multicast support:

Sends only one video stream per camera to multiple XProtect Smart Clients. Optimize the network load in systems with many users viewing the same camera(s) live

Tiered management rights:

Makes it possible to assign partial management permissions to system administrators in the Management Client

Dual authorization

Offers an additional level of system security for customers operating in high security areas, where users are granted access to the system only when a second user or supervisor has confirmed the login with a successful authorization of the second user

System Monitor

Customizable real-time system monitoring dashboard and report function for proactive maintenance of the VMS installation



Main product components

Recording Server / Failover Recording Server

Records and stores video, audio and metadata, and provides operators and other users access to live and recorded streams Enables fast discovery of almost 5,000 IP cameras, IP video

encoders and digital video recorder (DVR) models from close to 150 different manufacturers

Manages the operation of and events from cameras and other connected security devices

Full system scalability because an unlimited number of recording servers can be added to one system

High-availability option where failover recording servers act as a backup to primary recording servers

Management Server

Central coordination and repository for all system configuration data that is stored in an internal or external SQL database

User authentication and user rights management with support for basic users, local Widows users or via Windows® Active Directory

Maintains an array of system and audit logs May be clustered for high-availability deployments

Management Client

Single-point system administration interface for centralized management of all system configuration aspects

Event Server

Provides advanced multi-layered map giving operators interactive access and control of the complete surveillance system

Hosts features for the alarm function to provide a consolidated and clear overview of security and system-related alarms

Hosts possible Milestone Integration Platform Software Development Kit (MIP SDK) solution plug-ins May be clustered for high-availability deployments

XProtect Smart Wall

Flexible and hardware independent video wall support included Automatic or manual control of content

Supports a rich set of content types, including live and playback video, maps, alarms, bookmarks, HTML pages, text messages,

XProtect clients

XProtect Smart Client

XProtect Smart Client is the primary user interface for security operators and other daily users. Its adaptable user interface provides an extremely efficient working environment that can be optimized for different tasks and operator requirements

XProtect® Web Client

Simplified web-based client interface for Milestone VMS that allows users to view, play back and share video from all the most common operating systems and web browsers

Milestone Mobile

Milestone Mobile is a free application for smartphones and tablets specially designed for Milestone VMS solutions, enabling users to effectively monitor their video from anywhere, at any time

New features in XProtect Corporate 2016 R2

Major extensions of the system configuration API

- Camera management
 All aspects of camera configuration including settings of
 motion detection and privacy mask, plus ability to move
 devices between recording servers
- Role and user administration
 Role and user definition and rights management to cameras and functions
- Storage management
 Define storage size and retention time and the ability to read size of used storage

Integration options

- The Milestone Integration Platform Software
 Development Kit (MIP SDK) enables seamless
 integration of video analytics algorithms and other thirdparty applications in XProtect Smart Client and
 Management Client
- Compatible with XProtect® Transact and XProtect® Retail, which integrate video surveillance with ATMs, point-of-sale (POS) and enterprise resource planning (ERP) systems for managing loss prevention and fraud
- Compatible with XProtect[®] Access for video enabled physical security, which integrates with access control and intrusion systems
- Compatible with XProtect® LPR for automatic reading and tracking of vehicle license plates
- Generic event integration enables easy and fast integration of third-party applications and systems via a simple message-based socket communication interface
- Supports Milestone ONVIF Bridge that enables full video interoperability in multivendor installations using a standardized ONVIF compliant video-out interface
- System configuration API enables external applications to make changes to the system's configuration